



artisJet 5000T / 5000U Printer

How to Update the SCM Board by Program Writer

a) Please power on the machine and make it get READY mode.


Step 1 : Turn off the machine. Find out the Program Writer Hardware and connect it with the computer and SCM board.

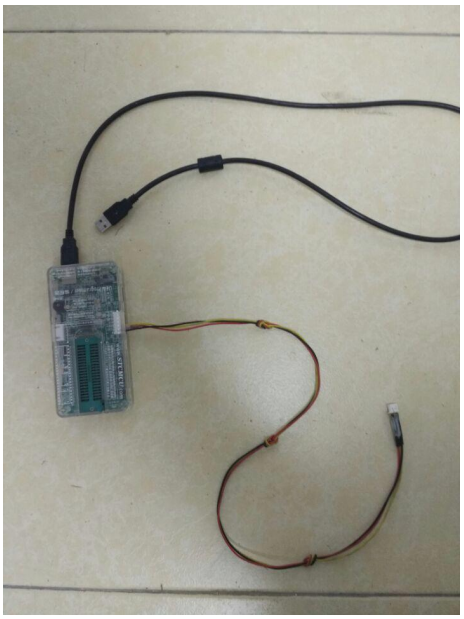

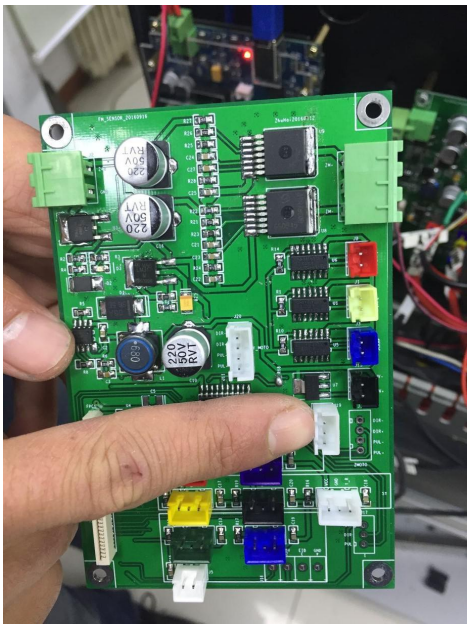


Step 2 : Find out the Program Writer Software and open it.



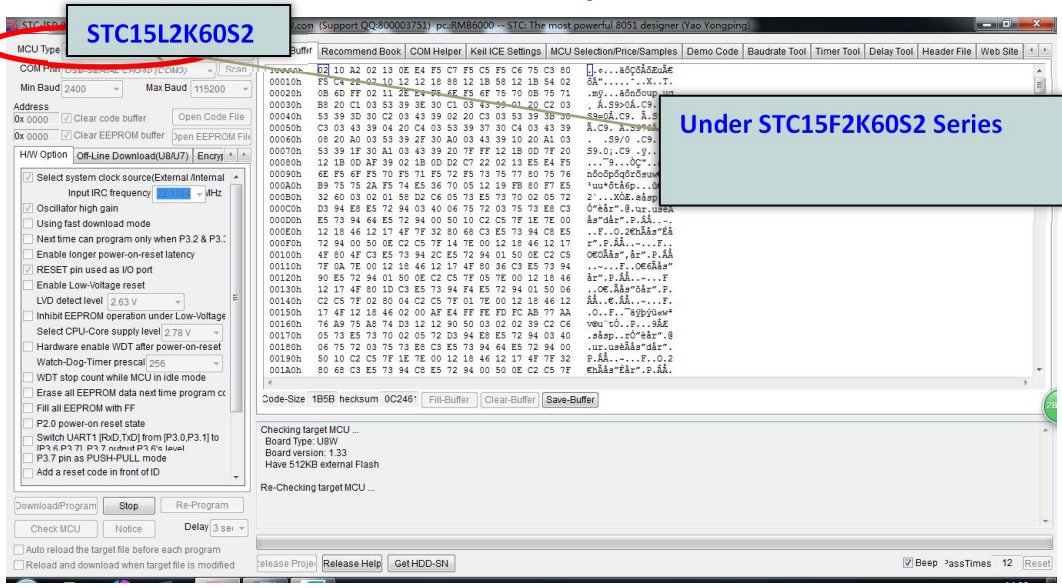




Step 4 : Click Open Code File and select the latest version file (".hex"format file).

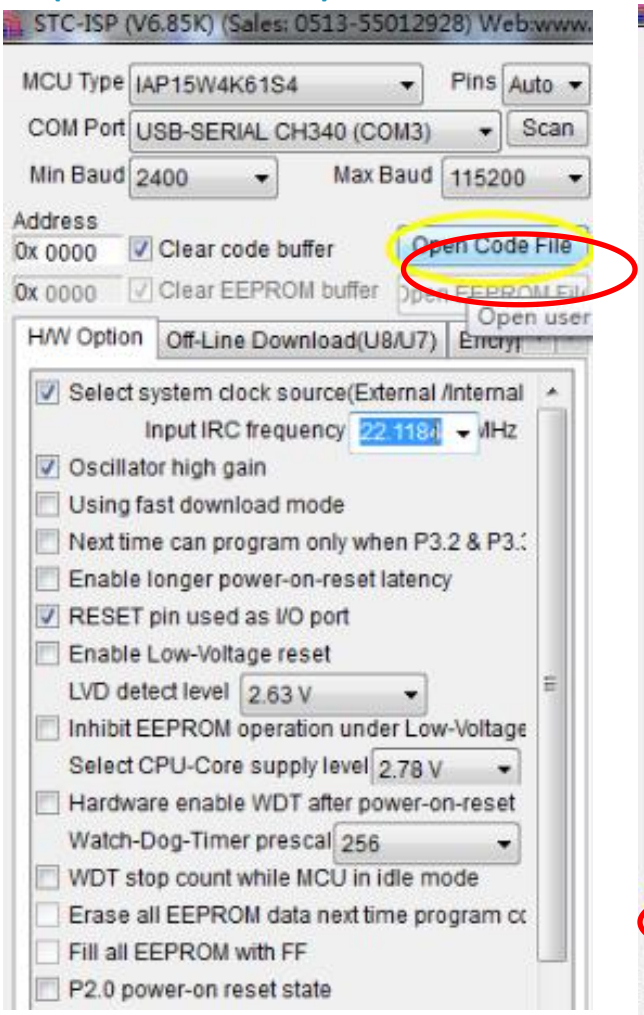


Step 5 : Click Download/Program button.

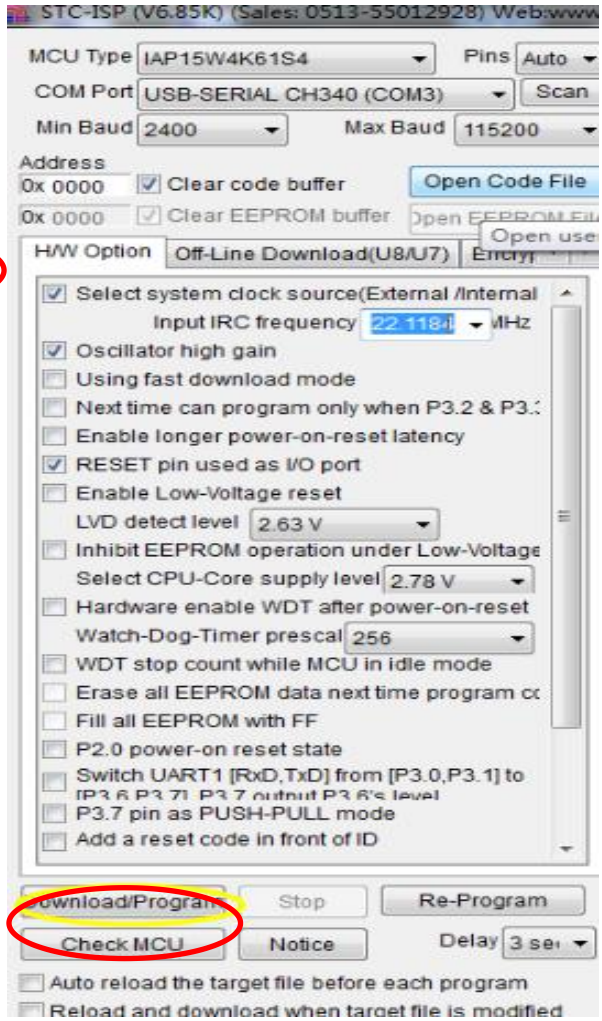

Step 6 : When there is new window appears, click OK.




Step 7 : When "Re-Checking target MCU" shows in software, power on the machine.

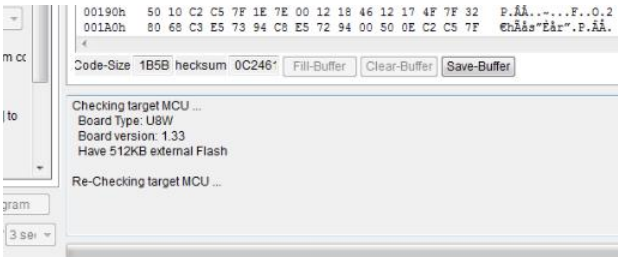

Copyright © 2016 Signs Full Joint Tech Co.,Ltd



Step 8 : After few seconds, “Complete” shows in software with Beeps from the machine, restart the machine.

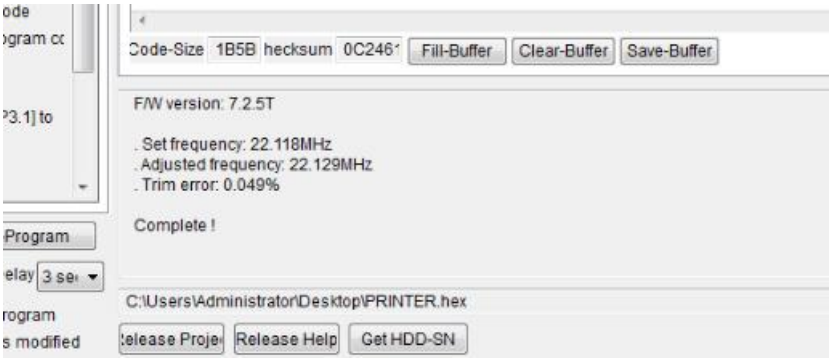

NOTE: Do not press General Power Button too often, we need to wait at least 10 seconds before press it again.